


Yutaki S Combi

Compact all-in-one system: heating, hot water and cooling with integrated stainless steel tank



Extensive range of models

The Yutaki S Combi is designed for any type of installation thanks to its wide range of models. From 1.85 kW to 17.80 kW for heating, and from 3.80 kW to 13.70 kW for cooling.

Space-saving and ultraquiet

The Yutaki S Combi unit can be installed in the kitchen thanks to its compact size and low noise level.

The large space saving of up to 70% compared to other system is due to the innovative hot water tank integrated into the indoor unit.

Choose your size

The Yutaki S Combi includes 2 tank models: 200 and 260 L.

Moreover, the 2nd temperature kit can be incorporated into the 200 L unit.

Easy installation and maintenance


Compared to a split system (indoor unit-hot water tank), the Yutaki S Combi allows fast installation with minimal costs since:

- All water and refrigerant connections are aligned at the top. (Fig. 1)
- Most components are accessible from the front of the unit.
- Easy access to information from the LCD control without having to open the indoor unit.


Stainless steel tank with built-in heating element

The only compact model fitted with a hot water tank with **backup heating element** for emergency hot water, activated with a single button.

Fig. 1

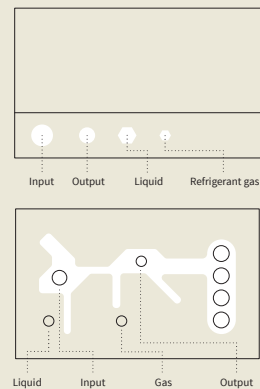

Indoor units Outdoor units



- RWD-2.0NRW(S)E RWD-4.0NW(S)E RAS-2WHVNRP RAS-4WH(V)NPE
- RWD-2.5NRW(S)E RWD-5.0NW(S)E RAS-3WHVNRP RAS-5WH(V)NPE
- RWD-3.0NRW(S)E RWD-6.0NW(S)E RAS-3WHVNRP RAS-6WH(V)NPE


Yutaki S Combi

System		Yutaki S 2 Combi	Yutaki S 2.5 Combi	Yutaki S 3 Combi	Yutaki S 4 Combi	Yutaki S 5 Combi	Yutaki S 6 Combi
Capacity	Heating (Min/Nom/Max) kW	1.85/4.30/6.50	1.85/6.00/8.60	2.10/8.00/11.00	4.30/11.00/15.20	4.80/14.00/16.70	5.50/16.00/17.80
	Cooling (Nom/Max) kW	4.00/5.00	5.30/6.00	6.50/7.00	7.20/11.80	9.50/12.60	10.50/13.70
Consumption	Heating (Nom) kW	0.82	1.25	1.65	2.20	2.97	3.50
	Cooling (Nom) kW	1.00	1.47	1.94	2.18	2.68	3.17
Electrical power	1~230V 50Hz	-	-	-	3N~400V 50 Hz	3N~400V 50 Hz	3N~400V 50 Hz
	1~230V 50Hz	-	-	-	3N~400V 50 Hz	3N~400V 50 Hz	3N~400V 50 Hz
COP (Water 35°C, Ambient 7°C)	Nominal	5.25	4.80	4.60	5.00	4.71	4.57
EER (Water 7°C, Ambient 35°C)	Nominal	3.12	3.60	3.35	3.54	3.54	3.31
Hot water energy rating (Profile L-2000)		A+	A+	A+	A+	A+	A+
Seasonal efficiency hot water, COP _{sw} / η _s (Profile L-2000)		3.30/132	3.30/132	3.30/132	3.25/130	3.25/130	3.25/130
Hot water energy rating (Profile XL-2600)		A+	A+	A+	A+	A+	A+
Seasonal efficiency hot water, COP _{sw} / η _s (Profile XL-2600)		3.40/136	3.40/136	3.40/136	3.35/134	3.35/134	3.35/134
Energy rating at 35°C	Medium climate	A+++	A+++	A+++	A+++	A+++	A+++
Seasonal efficiency at 35°C, SCOP / η _s		4.93/181	4.58/177	4.25/175	4.80/189	4.48/176	3.90/153
Energy rating at 55°C		A++	A++	A++	A++	A++	A++
Seasonal efficiency at 55°C, SCOP / η _s		3.58/133	3.38/130	3.25/125	3.50/137	3.43/134	3.23/126
ESEER		3.36	3.26	3.26	3.33	3.29	2.84
SEER / η _s	Single-phase	4.11/162	4.13/162	3.95/155	4.93/194	4.83/190	4.70/185
	Three-phase	-	-	-	5.05/199	4.92/194	4.78/188
Outdoor operating temperatures	Heating (DB) °C	-20 to 25	-20 to 25	-20 to 25	-25 to 25	-25 to 25	-25 to 25
	Hot water °C	-20 to 35	-20 to 35	-20 to 35	-25 to 35	-25 to 35	-25 to 35
	Cooling (DB) °C	10 to 46	10 to 46	10 to 46	10 to 46	10 to 46	10 to 46
Water production temperatures	Heating °C	20 to 60	20 to 60	20 to 60	20 to 60	20 to 60	20 to 60
	Hot water °C	30 to 75	30 to 75	30 to 75	30 to 75	30 to 75	30 to 75
	Cooling °C	5 to 22	5 to 22	5 to 22	5 to 22	5 to 22	5 to 22
Refrigerant pipe diameter	Liquid-gas inches	1/4-1/2	1/4-1/2	1/4-5/8	3/8-5/8	3/8-5/8	3/8-5/8
Water pipe diameter	Input-output inches	1-1	1-1	1-1	1-1/4-1-1/4	1-1/4-1-1/4	1-1/4-1-1/4
Hot water pipe diameter	Input-output inches	3/4-3/4	3/4-3/4	3/4-3/4	3/4-3/4	3/4-3/4	3/4-3/4
Indoor unit		RWD-2.0NRW(S)E	RWD-2.5NRW(S)E	RWD-3.0NRW(S)E	RWD-4.0NW(S)E	RWD-5.0NW(S)E	RWD-6.0NW(S)E
Minimum water volume of the installation	l	28	28	28	38	46	55
Water flow (Min-Nom-Max)	m ³ /h	0.50 - 0.77 - 1.80	0.60 - 1.03 - 1.90	0.60 - 1.03 - 1.90	1.00 - 1.89 - 2.70	1.10 - 2.41 - 2.80	1.20 - 2.75 - 2.80
Emergency heating element in primary	Steps/Capacity n ^o /kW	3 / 1 - 1 - 1	3 / 1 - 1 - 1	3 / 1 - 1 - 1	3 / 2 - 2 - 2	3 / 2 - 2 - 2	3 / 2 - 2 - 2
Hot water emergency heating element	Steps/Capacity n ^o /kW	1 / 2,7	1 / 2,7	1 / 2,7	1 / 2,7	1 / 2,7	1 / 2,7
Sound power	dB(A)	37	37	37	39	39	39
Dimensions (H (with connections) x W x D)	mm	1,750(1,816) x600x733	1,750(1,816) x600x733	1,750(1,816) x600x733	1,750(1,816) x600x733	1,750(1,816) x600x733	1,750(1,816) x600x733
Tank weight 200L / 260L solar	kg	121/131/131	122/132/132	122/132/132	120/130/130	122/132/132	122/132/132
Solar pipe diameter (260L solar tank)	Input-output inches	1/2-1/2	1/2-1/2	1/2-1/2	1/2-1/2	1/2-1/2	1/2-1/2
Solar exchange surface (260L solar tank)	m ²	0.37	0.37	0.37	0.37	0.37	0.37
Maximum current	Single-phase A	27	27	27	41.5	41.5	41.5
	Three-phase A	-	-	-	22.4	22.4	22.4
Outdoor unit		RAS-2WHVNRP	RAS-2.5WHVNRP	RAS-3WHVNRP	RAS-4WH(V)NPE	RAS-5WH(V)NPE	RAS-6WH(V)NPE
Air flow	m ³ /h	2,526	2,526	2,982	4,800	5,400	6,000
Sound pressure	dB(A)	46	47	50	49	50	50
Sound power	dB(A)	61	63	64	64	65	67
Minimum pipe length	m	3	3	3	5	5	5
Maximum pipe length	m	50	50	50	75	75	75
Maximum height difference (highest OU/lowest OU)	m	30/20	30/20	30/20	30/20	30/20	30/20
Compressor		Scroll DC Inverter	Scroll DC Inverter	Rotary DC Inverter	Scroll DC Inverter	Scroll DC Inverter	Scroll DC Inverter
Refrigerant		R32	R32	R32	R410A	R410A	R410A
Refrigerant charge (length without additional charge)	kg (m)	1.2 (10)	1.3 (10)	1.3 (10)	3.3 (15)	3.4 (15)	3.4 (15)
Additional refrigerant charge	g/m	15	15	15	60	60	60
Dimensions (H x W x D)	mm	600x792x300	600x792x300	600x792x300	1,380x950x370	1,380x950x370	1,380x950x370
Weight	kg	45	45	44	103	103	103
Maximum current	Single-phase/Three-phase	13/-	13/-	17/-	30/14	30/14	30/16

Compatible controls and accessories:

Remote control
PC-ARFHE
Included

Cooling Kit
ATW-CKM-01
Can be used to switch machine operation to cold.



2nd temperature kit
ATW-2TK-06
Only compatible with built-in Yutaki S Combi 200L.
ATW-2TK-07
For wall-mounting. Compatible with the entire Yutaki range